


TSA/LR 100 - 250

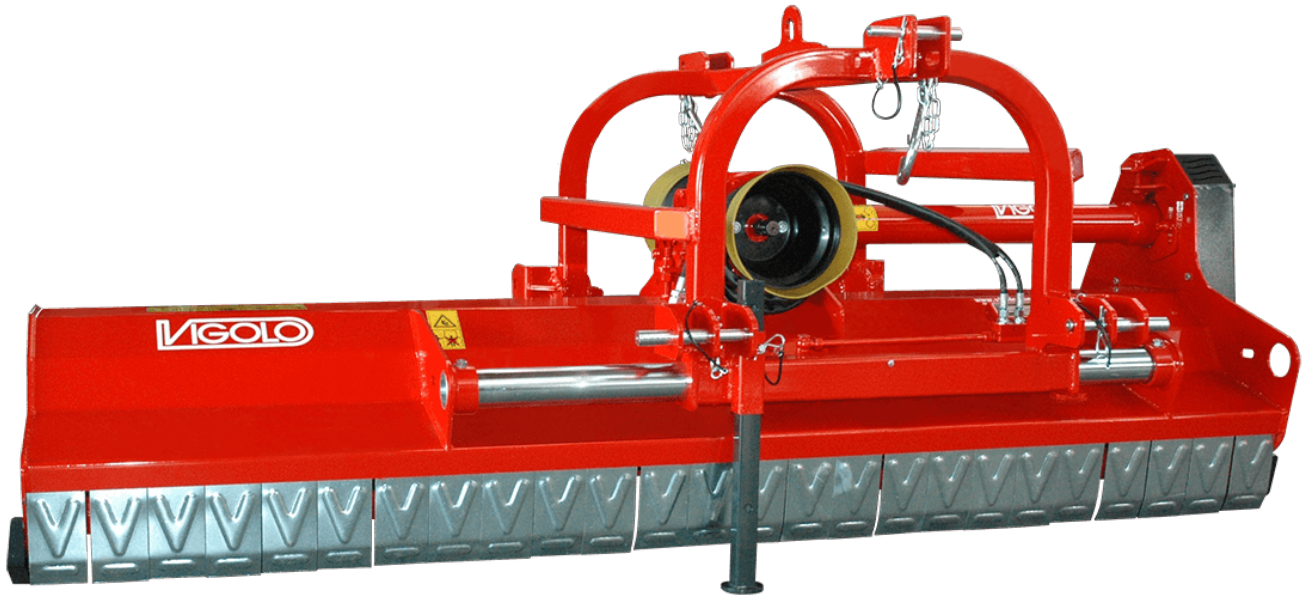


Standard Equipment

- 3 points ISO universal hitch with 1st category fork (TSA/LR 100÷140), double headstock for front and rear use
- 3 points ISO universal hitch with 1st/2nd category fork (TSA/LR 150÷250), double headstock for front and rear use
- Gearbox with free wheel 1000', 2 pto, mod. Vigolo F810
- Arrangement for version 540' with inversion of the pulleys
- Triple counter-knife
- Hydraulic side shift
- Rear roller adjustable in position with scraper or self-cleaning
- Direct cardan shaft (tractor side fork 1" 3/8 Z6)
- Front protection flaps
- EC guard kit

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com



Supporto forgiato
Cast lug
Geschmiedeter Träger
Support forgé



Mod.	 Lavoro mm	 Ingombro mm	HP min - max	Kg 	 8	 24	 18	 ± 125	 2
TSA/LR 100	1000	1135	30-100	430	8	24	18	± 125	2
TSA/LR 120	1200	1335	30-100	470	10	28	22	± 125	2
TSA/LR 140	1400	1535	30-100	500	12	32	26	± 125	3
TSA/LR 150	1500	1635	40-100	530	14	36	28	± 150	3
TSA/LR 160	1600	1765	40-100	570	14	36	30	± 150	3
TSA/LR 180	1800	1965	40-100	600	16	40	34	± 200	4
TSA/LR 200	2000	2165	50-100	650	18	44	38	± 200	4
TSA/LR 220	2200	2365	50-100	710	20	48	40	± 200	4
TSA/LR 250	2500	2665	60-100	770	22	56	48	± 200	5

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com