

TSL 130 - 250





Standard Equipment


- 3 points ISO universal hitch with 1st category oscillating fork (pins of 1st/2nd cat)
- Gearbox with free wheel 540', 1 pto, mod. Vigolo F810
- Counter-knife
- Manual side shift
- Self-cleaning rear roller adjustable in height with scraper
- Opening rear door for maintenance
- Direct cardan shaft (tractor side fork 1" 3/8 Z6)
- Side protection blades
- Front protection flaps
- EC guard kit

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com



Mod.	 Lavoro mm	 Ingombro mm	 HP min - max	 Kg				
TSL 130	1300	1460	30-100	440	28	14	± 125	3
TSL 140	1400	1560	30-100	480	28	14	± 125	3
TSL 160	1600	1760	35-100	520	32	16	± 125	3
TSL 180	1800	1960	40-100	580	36	18	± 125	4
TSL 200	2000	2160	40-100	640	40	20	± 125	4
TSL 220	2200	2360	50-100	660	44	22	± 125	4
TSL 230	2300	2460	50-100	690	48	24	± 125	4
TSL 250	2500	2660	60-100	750	56	28	± 125	4

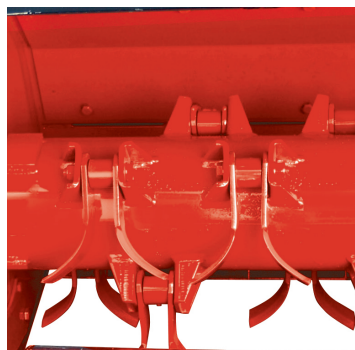

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
 Via dell'Industria, 27/A
 36045 Alonte (VI) - ITALY
 Tel. +39 0444 436247
 Fax +39 0444 436237
www.vigolo.com - info@vigolo.com