

FPG 205 - 300




Standard Equipment

- 3 points ISO universal hitch with 2nd category oscillating fork
- One speed central gearbox 540'/540' eco mod. Vigolo C8, 1 pto
- Transmission by gears
- 6 curved blades per flange
- Rear hood with spring shock absorbers
- Lateral rear roller adjustment by pins (only for versions with rear roller)
- Lateral tie-rods (FPG 285-300)
- Arrangement for seeder coupler (ASM and ASI N)
- Central cardan shaft with disk clutch (tractor side fork 1" 3/8 Z6)
- EC guard kit

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com

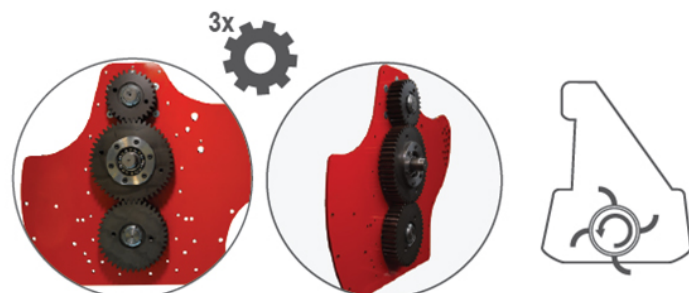

Mod.	 Lavoro	 Ingombro	 HP min - max	 N° zappe *	 540'	 540' - 1000'	 kg Slitte	 kg Rullo Export	 kg Rullo Spuntoni Rullo Spirale	 kg Rullo Packer Ø 323 / 470
FPG 205	2050	2250	70 - 180	48	195	200 - 270	810	880	900	980
FPG 225	2250	2450	70 - 180	54	195	200 - 270	860	930	950	1050
FPG 245	2450	2650	80 - 180	54	195	200 - 270	900	1000	1020	1130
FPG 265	2650	2850	80 - 180	60	195	200 - 270	960	1070	1090	1210
FPG 285	2850	3050	90 - 180	66	195	200 - 270	1020	1140	1160	1260
FPG 300	3000	3200	90 - 180	72	195	200 - 270	1150	1280	1300	1430

* Standard: 6 zappe curve per flangia - 6 curved blades per flange - 6 gebogene Messer pro Flansch - 6 lames courbes ch. flange



VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com