


## MU2/R 100 - 250

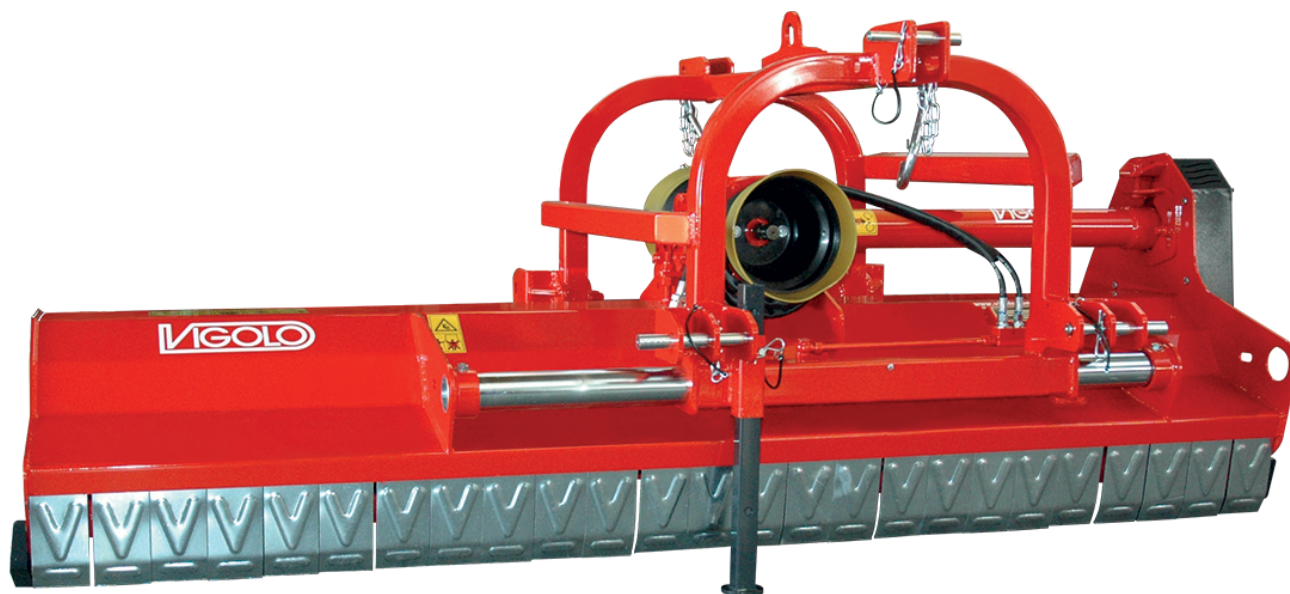


### Standard Equipment

- 3 points ISO universal hitch with 1st category fork (MU2/R 100÷140), double headstock for front and rear use
- 3 points ISO universal hitch with 1st/ 2nd category fork (MU2/R 150÷250), double headstock for front and rear use
- Gearbox with free wheel 1000', 2 pto, mod. Vigolo F810
- Arrangement for version 540' with inversion of the pulleys
- Double counter-knife
- Hydraulic side shift
- Rear roller adjustable in position with scraper or self-cleaning
- Closed shredding chamber with increased volume for material internal discharge
- Direct cardan shaft (tractor side fork 1" 3/8 Z6)
- Front protection flaps
- EC guard kit

---










### VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale  
Via dell'Industria, 27/A  
36045 Alonte (VI) - ITALY  
Tel. +39 0444 436247  
Fax +39 0444 436237  
[www.vigolo.com](http://www.vigolo.com) - [info@vigolo.com](mailto:info@vigolo.com)



Supporto sagomato  
Shaped lug  
Profiliertes Träger  
Support profilé



Mod.	 Lavoro mm	 Ingombro mm	 HP min - max	 Kg				 ±	
MU2/R100	1000	1110	25 - 100	455	8	24	18	± 125	2
MU2/R 120	1200	1310	30 - 100	500	10	28	22	± 125	2
MU2/R 140	1400	1510	30 - 100	520	12	32	26	± 125	3
MU2/R 150	1500	1640	40 - 100	550	14	36	28	± 200	3
MU2/R 160	1600	1740	40 - 100	570	14	36	30	± 200	3
MU2/R 180	1800	1970	40 - 100	605	16	40	34	± 250	4
MU2/R 200	2000	2170	40 - 100	630	18	44	38	± 250	4
MU2/R 220	2200	2370	50 - 100	700	20	48	40	± 250	4
MU2/R 250	2500	2670	60 - 100	760	22	56	48	± 250	5

## VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale  
Via dell'Industria, 27/A  
36045 Alonte (VI) - ITALY  
Tel. +39 0444 436247  
Fax +39 0444 436237  
[www.vigolo.com](http://www.vigolo.com) - [info@vigolo.com](mailto:info@vigolo.com)