


MX2 200 - 300

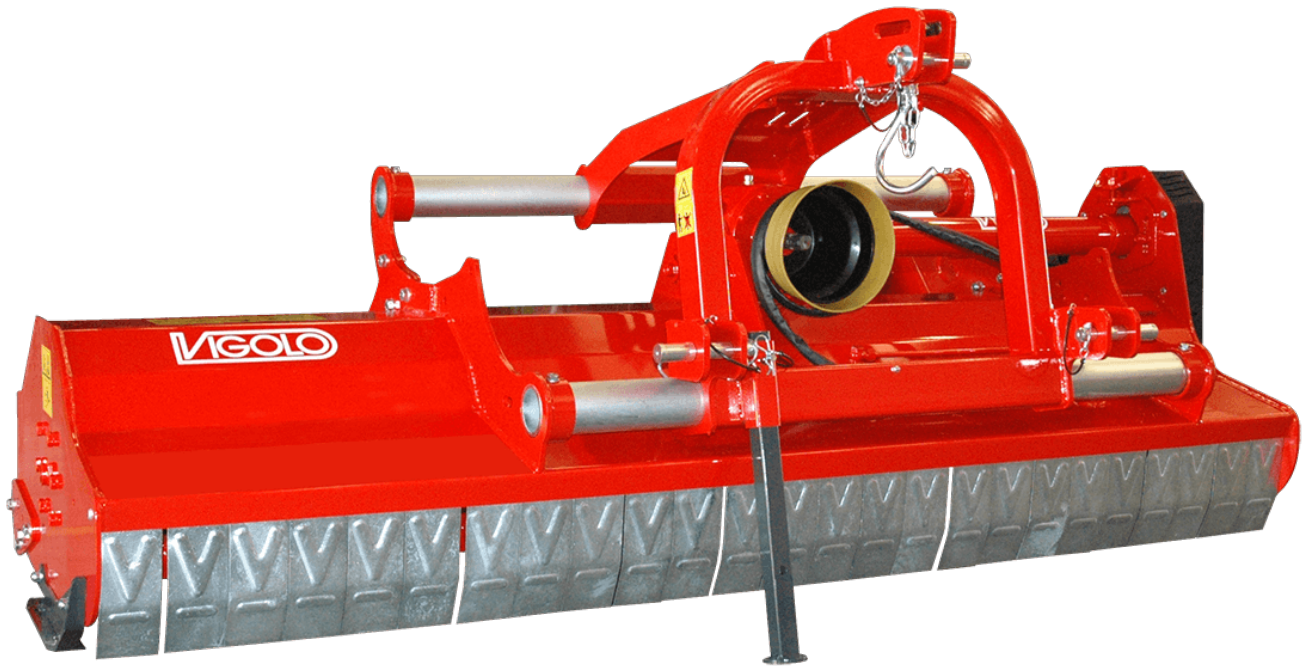

Standard Equipment

- 3 points ISO universal hitch with 2nd category fork
- Gearbox with free wheel 540', 2 pto, mod. Vigolo L810 (MX2 200÷250)
- Gearbox with free wheel 1000', 2 pto, mod. Vigolo L810 (MX2 280/300)
- Arrangement for version 540'/1000' with inversion of the pulleys
- Arrangement for front version
- High resistance steel Hardox® reinforced screwed double frame
- Triple counter-knife
- Manual side shift through double tube of headstock
- Rear roller adjustable in height with scraper, increased bearings
- Closed shredding chamber with increased volume for material internal discharge
- Direct cardan shaft (tractor side fork 1" 3/8 Z6)
- Front protection flaps
- EC guard kit

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com



Supporto forgiato
Cast lug
Geschmiedeter Träger
Support forgé



Mod.	 Lavoro mm	 Ingombro mm	HP min - max	 Kg	 mm	 mm	 mm	 mm	 mm
MX2 200	2000	2170	60 - 120	790	18	44	38	± 250	5
MX2 220	2200	2370	60 - 120	820	20	48	40	± 250	5
MX2 250	2500	2670	70 - 120	890	22	56	48	± 250	5
MX2 280	2800	2990	80 - 150	960	24	64	52	± 250	6
MX2 300	3000	3190	90 - 150	1030	28	68	56	± 250	6

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com