


RSA/R PLUS 160 - 250

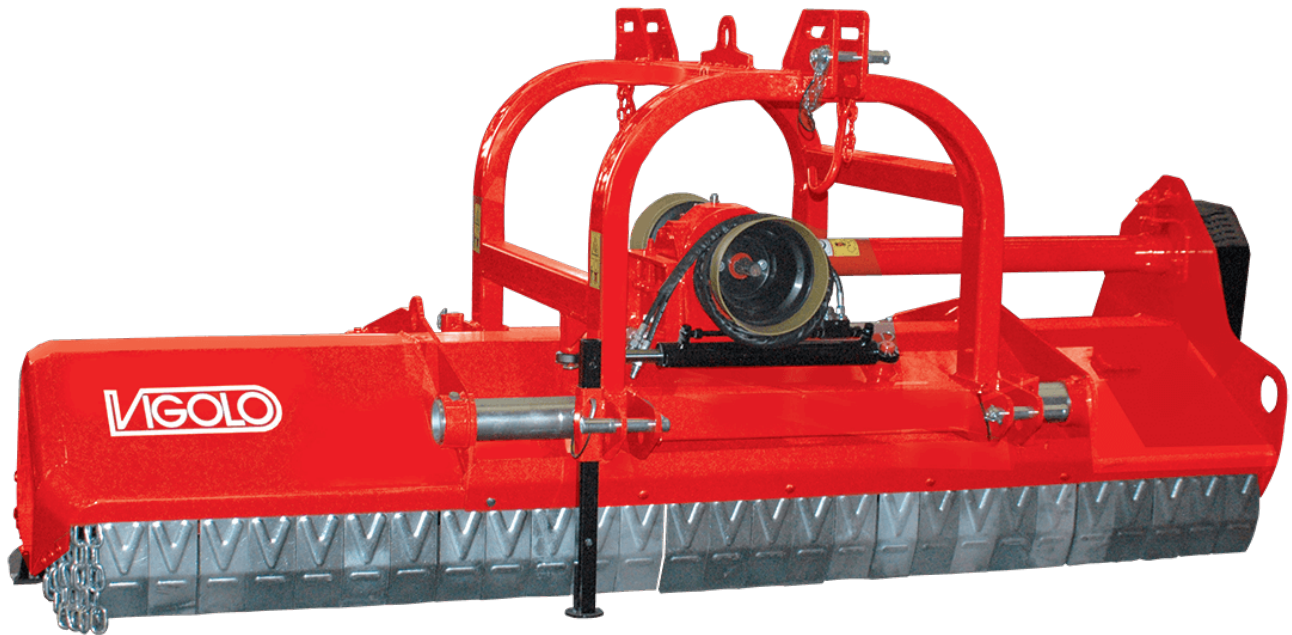

Standard Equipment


- 3 points ISO universal hitch with 2nd category fork, double headstock for front and rear use
- Gearbox with free wheel 1000', 2 pto, mod. Vigolo L810
- Arrangement for version 540' with inversion of the pulleys
- Reinforced double frame
- Triple counter-knife
- Hydraulic side shift through double tube of headstock
- Rear roller adjustable in height with scraper, increased bearings
- Front rounded and flattened side
- Trees guard belts side
- Direct cardan shaft (tractor side fork 1" 3/8 Z6)
- Front protection flaps
- EC guard kit

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com



Fiancata arrotondata
Rounded side
Abgerundetes Gehäuse
Côté arrondie



Supporto forgiato
Cast lug
Geschmiedeter Träger
Support forgé



Mod.	 Lavoro mm	 Ingombro mm	HP min - max	Kg 	 14	 28 + 14	 ± 200	 5
RSAR Plus 160	1600	1770	40 - 120	770	14	28 + 14	± 200	5
RSAR Plus 180	1800	1970	40 - 120	800	16	32 + 16	± 200	5
RSAR Plus 200	2000	2170	50 - 120	830	18	36 + 18	± 200	5
RSAR Plus 220	2200	2370	50 - 120	880	20	40 + 20	± 200	5
RSAR Plus 250	2500	2670	60 - 120	930	22	44 + 22	± 200	5

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com