


## TSA/L 100 - 250

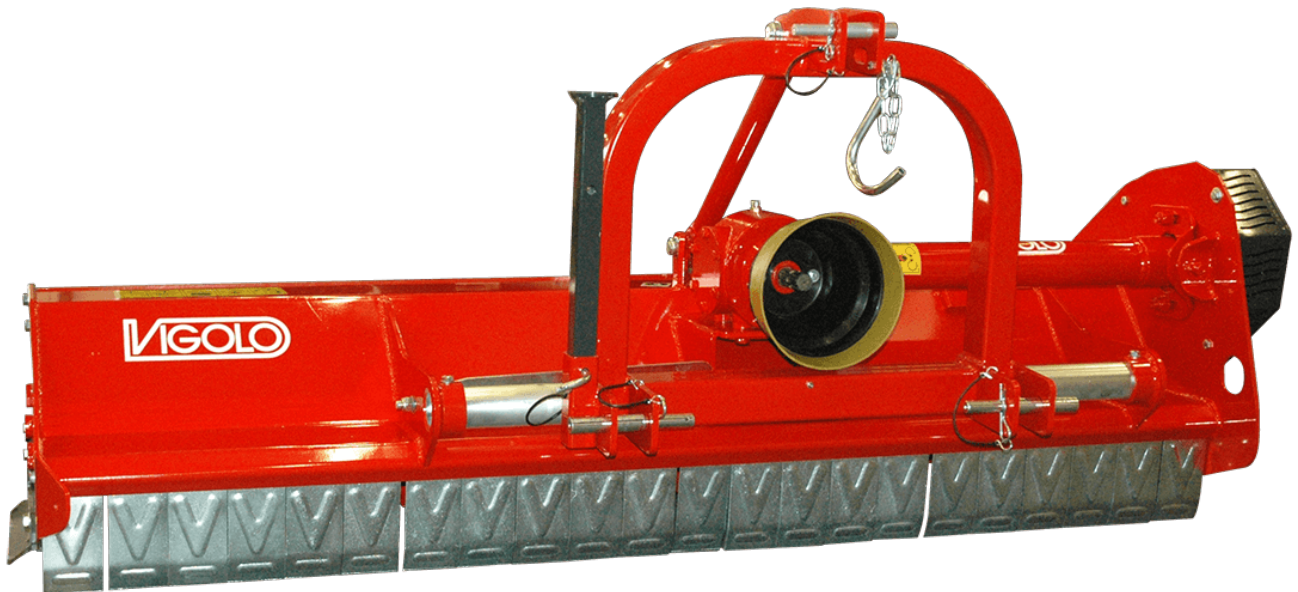


### Standard Equipment

- 3 points ISO universal hitch with 1st category fork (TSA/L 100÷140)
- 3 points ISO universal hitch with 1st/2nd category fork (TSA/L 150÷250)
- Gearbox with free wheel 540', 1 pto, mod. Vigolo F810
- Arrangement for version 1000' with inversion of the pulleys
- Triple counter-knife
- Manual side shift
- Rear roller adjustable in position with scraper or self-cleaning
- Opening rear door for maintenance
- Direct cardan shaft (tractor side fork 1" 3/8 Z6)
- Front protection flaps
- EC guard kit

---










### VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale  
Via dell'Industria, 27/A  
36045 Alonte (VI) - ITALY  
Tel. +39 0444 436247  
Fax +39 0444 436237  
[www.vigolo.com](http://www.vigolo.com) - [info@vigolo.com](mailto:info@vigolo.com)



Supporto forgiato  
Cast lug  
Geschmiedeter Träger  
Support forgé



Mod.	 Lavoro mm	 Ingombro mm	 HP min - max	 Kg					
TSA/L 100	1000	1135	30-100	380	8	24	18	± 125	2
TSA/L 120	1200	1335	30-100	420	10	28	22	± 125	2
TSA/L 140	1400	1535	30-100	450	12	32	26	± 125	3
TSA/L 150	1500	1635	40-100	480	14	36	28	± 200	3
TSA/L 160	1600	1765	40-100	520	14	36	30	± 200	3
TSA/L 180	1800	1965	40-100	550	16	40	34	± 200	4
TSA/L 200	2000	2165	50-100	600	18	44	38	± 200	4
TSA/L 220	2200	2365	50-100	660	20	48	40	± 200	4
TSA/L 250	2500	2665	60-100	720	22	56	48	± 200	5

## VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale  
Via dell'Industria, 27/A  
36045 Alonte (VI) - ITALY  
Tel. +39 0444 436247  
Fax +39 0444 436237  
www.vigolo.com - info@vigolo.com