


TSA/PR 180 - 300




Standard Equipment

- 3 points ISO universal hitch with 2nd category fork , double headstock for front and rear use
- Gearbox with free wheel 1000', 2 pto, mod. Vigolo L810 (TSA/PR 180-250)
- Gearbox with free wheel 1000', 2 pto, mod. Vigolo E810 (TSA/PR 280/300)
- Arrangement for version 540' with inversion of the pulleys
- Triple counter-knife
- Hydraulic side shift
- Rear roller adjustable in height with scraper, increased bearings
- Direct cardan shaft (tractor side fork 1" 3/8 Z6)
- Front protection flaps
- EC guard kit


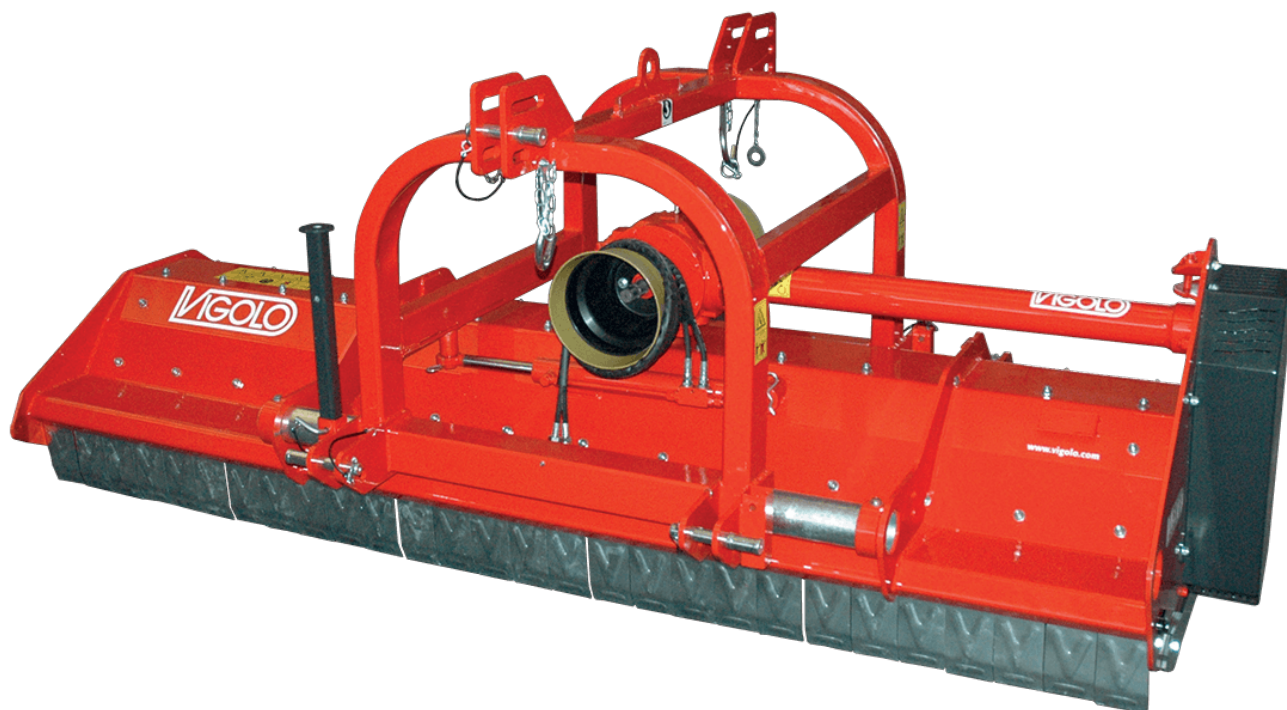







VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com



Supporto forgiato
Cast lug
Geschmiedeter Träger
Support forgé



Mod.	 Lavoro mm	 Ingombro mm	 HP min - max	 Kg				 ± 200	 5
TSA/PR 180	1800	1970	50-120	700	16	40	34	± 200	5
TSA/PR 200	2000	2170	50-120	750	18	44	38	± 200	5
TSA/PR 220	2200	2370	50-120	810	20	48	40	± 200	5
TSA/PR 250	2500	2670	60-120	880	22	56	48	± 200	5
TSA/PR 280	2800	2990	70-180	960	24	64	52	± 200	6
TSA/PR 300	3000	3190	80-180	1040	28	68	56	± 200	6

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com