

## TSL - V 320 - 460



### Standard Equipment











- 3 points ISO universal reinforced hitch with 2nd category oscillating fork (2nd/3rd cat. pins)
- Gearbox with free wheel 1000', 1 pto
- Counter-knife
- Screwed hood liner
- Rear roller adjustable in height with scraper
- Opening rear door for maintenance
- Locking safety system in closed position with automatic sequential release
- Direct cardan shaft (tractor side fork 1" 3/8 Z6)
- Rear light kit with road travel tables kit
- Side protection blades
- Front protection flaps
- EC guard kit

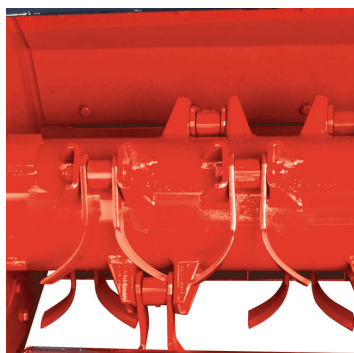
---

### VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale  
Via dell'Industria, 27/A  
36045 Alonte (VI) - ITALY  
Tel. +39 0444 436247  
Fax +39 0444 436237  
[www.vigolo.com](http://www.vigolo.com) - [info@vigolo.com](mailto:info@vigolo.com)



Mod.	 Lavoro mm	 Ingombro mm	 HP min - max	 Kg						
TSL-V-15 320	3200	3500	80-180	1700	64	32	-	40	40	4 + 4
TSL-V-15 400	4000	4300	100-180	1900	80	40	-	48	48	4 + 4
TSL-V-15 460	4600	4900	100-180	2000	96	48	-	56	56	5 + 5



## VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale  
 Via dell'Industria, 27/A  
 36045 Alonte (VI) - ITALY  
 Tel. +39 0444 436247  
 Fax +39 0444 436237  
[www.vigolo.com](http://www.vigolo.com) - [info@vigolo.com](mailto:info@vigolo.com)