

TST MAX 200 - 300




Standard Equipment


- 3 points ISO universal hitch with 2nd category fork
- Gearbox with free wheel 540', 1 pto, mod. Vigolo E810 (TST MAX 200÷250)
- Gearbox with free wheel 1000', 1 pto, mod. Vigolo E810 (TST MAX 280/300)
- Arrangement for version 540'/ 1000' with inversion of the pulleys
- Adjustable counter-knife
- Manual side shift
- Self-cleaning rear roller adjustable in height with scraper
- Opening rear door for maintenance
- Direct cardan shaft (tractor side fork 1" 3/8 Z6)
- Side protection blades
- Front protection flaps
- EC guard kit

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com



Mod.	 Lavoro mm	 Ingombro mm	 HP min - max	 Kg	 mm	 mm	 mm	 mm	 mm	 ± 125	 4
TST Max 200	2000	2160	50-180	800	48	24	48	26	26	± 125	4
TST Max 230	2300	2460	60-180	1000	56	28	56	30	30	± 125	5
TST Max 250	2500	2660	60-180	1100	60	30	60	32	32	± 125	5
TST Max 280	2800	2985	70-180	1200	68	34	68	36	36	± 125	6
TST Max 300	3000	3185	80-180	1300	72	36	72	40	40	± 125	6

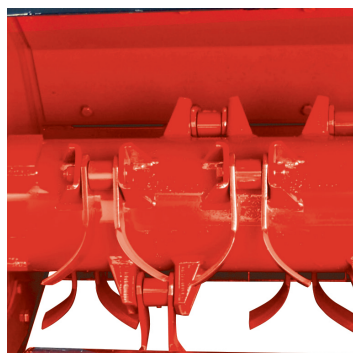

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
 Via dell'Industria, 27/A
 36045 Alonte (VI) - ITALY
 Tel. +39 0444 436247
 Fax +39 0444 436237
www.vigolo.com - info@vigolo.com